

DURA-SHINE™

PREMIUM



High Performance Unitized Matt Wheels

The High Quality INDUSTRIAL GRADE non woven wheels serve a number of purposes such as polishing various metallic surfaces including stainless steel, brass, copper etc. Long tried and Tested, they are used for light de-burring, punching, dent removal, final finishing of precision parts with matt finishing or even for achieving decorative finishing on utensils, steel railing watch straps, kitchen equipment, copper wares and so on. These wheels are known to withstand very high pressures.


Excellent Longlasting
finish & shine on
metallic surfaces.



Non Woven Pads

SIZES - 4, 6, 8, 10, 12, 14 inches

DENSITY (PLY) - U000(2P), U00(4P), U0(4P), U1(5P), U3(7P), U5(9P), U8(12P)

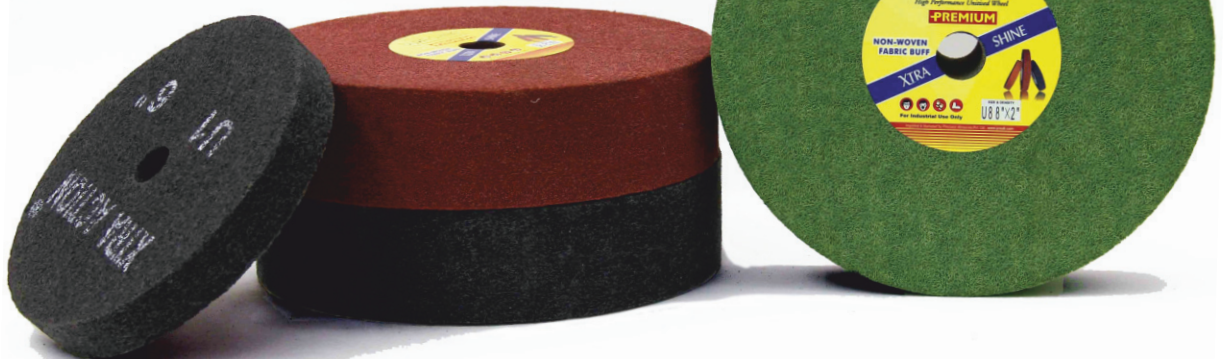



Non Woven Polishing Wheels

This is our Commercial Line of non woven wheels. For highly satisfactory polishing needs, these work well on a variety of applications and on all types of metallic surfaces. For Buffing, Dent Removal, Polishing all sorts of alloys etc.

Size	Density
100x13mm	U1, U3, U5, U8



Flap Discs (Al-Oxide)

These discs are made by coating aluminium oxide grains over a cloth backing to form a fan like configuration, thus creating a long lasting, cooler running disc.

These are used mainly for blending and applying finishing touches to edges and for treating flat and mildly contoured surfaces, cleaning of alloys etc. Also used for removing rust. And they need not be changed when used to treat different kinds of materials as fresh layers of abrasives are constantly being exposed as they are used.

Durakut PLUS +

Very high quality flap discs with high strength abrasive cloth. The backing fibre is of the highest standard.

FOR INDUSTRIAL USE

Size	Specification	Speed M/s	RPM	Pcs./Ctn.
100x16mm	#36, #60, #80, #120, #220, #320, #400	80 m/s	15300	400
125x22mm	#36, #60, #80, #120, #220	80 m/s	12200	200
180x22mm	#60, #80, #120	80 m/s	7000	80



Durakut GOLD (with Plastic Backing)

Size	Specification	Speed M/s	RPM	Pcs./Ctn.
100x16mm	#60, #80, #120, #220	80 m/s	15300	400
125x22mm	#60, #80, #120	80 m/s	12200	200





Plastic Backing



Metal Backing



Semi Flexible

Vertical Flap



Sander Disc


Velcro Disc (Al-Oxide)

Used for grinding and finishing of metals, woods, marble and stone. Generally used on random orbitals and rotary sanders. Used mainly in the automobile, woodworking and handicraft industries etc.

The high quality backing material gives each disc long life and guarantees high performance.

Size	Specification	Pcs./Ctn.
125mm - 8 holes	36, 46, 60, 80, 100, 120, 150 180, 220, 320, 400, 600	1200
150mm - 6 holes	36, 46, 60, 80, 100, 120, 150 180, 220, 320, 400, 600	1000

Usage: In maintenance and repair application, from medium grinding to light de-burring and finishing.

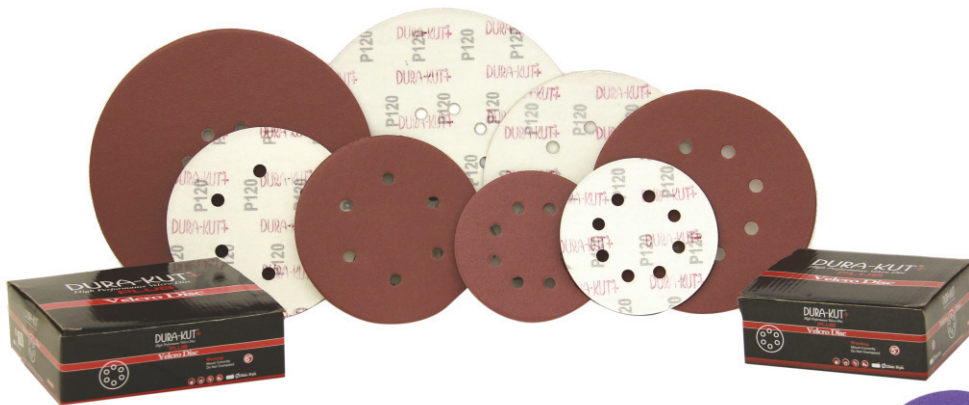

Ceramic Coated Velcro Film Disc (PET)

Size	Specification	Pcs./Ctn.
125mm - 8 holes	60, 80, 100, 120, 150, 180, 220, 320, 400, 600, 800, 1000, 1200, 1500, 2000	1000
150mm - 6 holes	36, 46, 60, 80, 100, 120, 150 180, 220, 320, 400, 600	1000

Key features being a superior bond with a film backing that allows it to be used on different types of curved surfaces and painted surfaces.

For Wood, Metal, Stone, Melamine.

High efficiency guaranteed.



DURA-KUT®

ROLL/WATER PROOF PAPER

DK15 - Latex Waterproof Paper



Semi latex paper for paint and auto usage.
Highly durable and flexible. Meant for sanding that needs a light touch.

DK310 - Waterproof Paper



Waterproof sheet for Wet and Dry sanding for applications such as finishing, paint preparation and automobile applications.

Electrocoated Aloxide Cloth Rolls

Available in 2 varieties
Commercial Series – DKJ 164A
Industrial Series – DKJ 165



Poly-Cotton blend backed roll made for rough and tough usage. This J weight roll is highly suitable for converting into belts as well.
High strength and flexibility

Precision Abrasives Pvt. Ltd. | www.preab.com

ISO 9001 : 2015